



SINCE 1975


DSC ALL STAINLESS STEEL F&T STEAM TRAPS

No. FSS5 · FSS5VF

MOP 30K x 320°C




- ALL STAINLESS STEEL BODY SUITABLE FOR LOW & MEDIUM PRESSURE SERVICE
- LARGE AMOUNT VENTING CAPABILITY OF COLD AIR WHEN START UP
- CONTINUOUS DISCHARGE OF CONDENSATE
- ALL STAINLESS STEEL PARTS ARE GOOD FOR CORROSION RESISTANCE AND LONGER SERVICE YEARS
- CONTINUOUS DISCHARGE DELIVER SMALLER NOISE
- BEST CHOICE FOR SERVICE OF STEAM MODUL CONTROL SYSTEM
- INTERNAL PARTS ARE REPLACEABLE

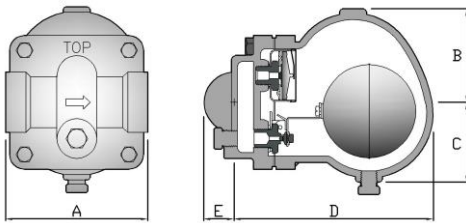

No. FSS5 DIMENSIONS (MM). MOP (KG/CM²). WT (KG)

TRAP NO.	CONN.SE.*	A	B	C	D	E	MOP	WT
FSS5	15.20.25	125	97	61	191	22	30	5

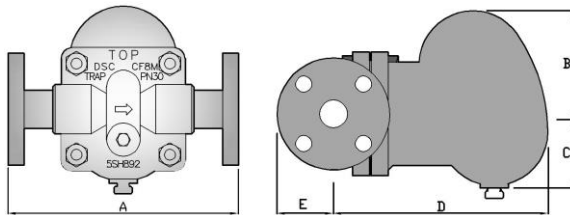

No. FSS5F

TRAP NO.	CONN.FE.*	A	B	C	D	E	MOP	WT
FSS5F	15.20.25	210	97	61	190	50	30	7.2

CONSTRUCTION OF MATERIALS

CAP & BODY	CF8M S.S 316
FLOAT	STAINLESS STEEL
MECHANISM	STAINLESS STEEL
SEAT & VALVE	HARDENED S. S
AIR VENT CAGE	STAINLESS STEEL
DIAPHRAGM OF AIR VENT	STAINLESS STEEL
GASKET	COMPRESSED NON-ASBESTOS
BOLTS & NUTS	STAINLESS STEEL

CONDENSATE DISCHARGE CAPACITY IN KG/HR.

