



SINCE 1975


DSC 11LD ALL STAINLESS STEEL AIR TRAP

No.11LD

MOP 28K x 260°C



- ALL SEALED STAINLESS STEEL BODY OF HIGH STRENGTH AND CORROSION RESISTANCE.
- FRICTIONLESS MECHANISM MAKES LONG SERVICE YEARS.
- INLET WITH INTEGRAL STRAINER.
- LIGHT IN WEIGHT.

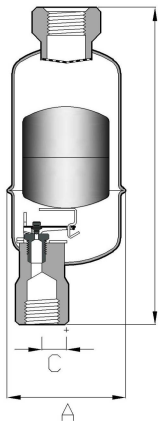

No.11LD DIMENSIONS (MM). MOP(KG/CM²). WT(KG)

TRAP NO.	CONN.SE*	OUTLET	A	B	C	MOP	WT
11LD	15.20.25	15	70	188	14	30	0.6

*NPT. PT. SW. AVAILABLE

*WELDIN FLANGE AVAILABLE, CONSULT FACTORY

CONSTRUCTION OF MATERIALS

BODY	S.S. 304
	S.S. 304L
	S.S. 316
MECHANISM	STAINLESS STEEL
FLOAT	STAINLESS STEEL
SEAT&VALVE	HARDENED S.S.
STRAINER	STAINLESS STEEL
BODY	S.S. 304L OR 316
MECHANISM	STAINLESS STEEL
FLOAT	STAINLESS STEEL

COLD WATER DISCHARGE CAPACITY IN KG/HR

MOP	9K	14K	17K	28K	
ORIFICE	1/8"	7/64"	38#	5/64"	
ΔP .KG/CM ²	3K	480	380	250	180
	5K	590	500	390	250
	9K	800	640	550	300
	14K	-	800	660	390
	17K	-	-	680	440
	28K	-	-	-	660

HOW TO ORDER : TRAP No. CONN. MOP.
DSC 11LD X 1/2"NPT X 9K